

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Publisher:

Declaration number:

Registration number:

ECO Platform reference number:

Issue date:

Valid to:

Flokk AS

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-2195-999-EN

NEPD-2195-999-EN

-

13.05.2020

13.05.2025

HÅG Creed 6004

Flokk AS

www.epd-norge.no





NEPD-2195-999-EN HÅG Creed 6004



General information

Product:

Owner of the declaration:

HÅG Creed 6004

Flokk AS

Contact person: Atle Thiis-Messel Phone: 0047 98 25 68 30 e-mail: atle.messel@flokk.com

Program operator:

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo

Phone: +47 97722020 e-mail: post@epd-norge.no Manufacturer:

Flokk AS

Declaration number:

NEPD-2195-999-EN

Place of production:

Flokk AS, Sundveien, N-7374

ECO Platform reference number:

Management system:

ISO 14001, Certificate No. 14001-0336 ISO 9001, Certificate No.9001-0336 From the accredited unit: SCAB Svensk Certifiering Norden AB

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture

Organisation no:
No 925 902 749

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Valid to: 13.05.2025

Declared unit: Year of study:

1 Pcs HÅG Creed 6004

2020

Declared unit with option:

2020

Comparability:

A1,A2,A3,A4

EPDs from programmes other than the Norwegian EPD Foundation

may not be comparable

Functional unit:

Author of the Life Cycle Assessment:

The declaration is developed using eEPD v4.0 from LCA.no Approval:

Company specific data are:

Collected/registered by: Laura Fouilland
Internal verification by: Atle Thiis-Messel

Verification:

Independent verification of data, other environmental information and the declaration according to ISO14025:2010, § 8.1.3 and § 8.1.4

Third party verifier:

Sign

il Some

Seniorforsker Erik Svanes

(Independent verifier approved by EPD Norway)

Approved:

Sign

Håkon Hauan Managing Director of EPD-Norway

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	60,80
Total energy use	MJ	933,88
Amount of recycled materials	%	45,59



Product

Market:

Worldwide

Product description:

The HÅG Creed builds on the best from two original groundbreakers, the HÅG H04 and HÅG H05, by legendary designer Peter Opsvik. It combines classic design with smart functionality, is user-friendly, and features our unique centre-tilt mechanism - HÅG in Balance®.

Product specification

The HÅG Creed 6004 has a medium-height backrest and is fully upholstered. It features the HÅG in Balance® centre-tilt mechanism. Adjustable seat height. Lockable in three positions. Five star base (Ø730 mm) in aluminium with curved/arched footplates. Standard 150 mm gas lift (Seat height: 390-515 mm).

Technical data:

Total weight: 14,1kg (packaging excluded)

Reference service life, product

15 years

Reference service life, building

Materials	kg %		Recycled share in material (kg)	Recycled share in material (%)
Metal - Aluminium	2,48	14,23	1,88	75,96
Metal - Steel	6,39	36,64	1,63	25,58
Textile - Polyester (PE)	0,27	1,55	0,27	100,00
Plastic - Polyurethane (PUR)	1,25	7,17	0,00	0,00
Plastic - Polyethylene	0,07	0,39	0,00	0,00
Plastic - Polypropylene (PP)	2,13	12,20	1,95	91,77
Plastic - Polyoxymethylene (POM)	0,21	1,18	0,00	0,00
Rubber, synthetic	0,45	2,58	0,00	0,00
Plastic - Nylon (PA)	0,59	3,40	0,00	0,00
Plastic - Polyamide with glass fibre (PAGF30)	0,28	1,62	0,00	0,00
Cardboard	3,32	19,05	2,53	76,30

LCA: Calculation rules

Declared unit:

1 Pcs HÅG Creed 6004

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:


Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Plastic - Polyoxymethylene (POM)	ecoinvent 3.4	Database	2015
Plastic - Polypropylene (PP)	ecoinvent 3.4	Database	2015
Plastic - Polyurethane (PUR)	ecoinvent 3.4	Database	2015
Rubber, synthetic	ecoinvent 3.4	Database	2015
Plastic - Nylon (PA)	Østfoldforskning	Database	2015
Metal - Aluminium	ecoinvent 3.3	Database	2016
Metal - Steel	ecoinvent 3.3	Database	2016
Cardboard	ecoinvent 3.4	Database	2017
Metal - Steel	ecoinvent 3.4	Database	2017
Metal coating - Powder coating on aluminium	ecoinvent 3.4	Database	2017
Metal coating - Powder coating on steel	ecoinvent 3.4	Database	2017
Plastic - Polyamide with glass fibre (PAGF30)	ecoinvent 3.4	Database	2017
Plastic - Polyethylene	ecoinvent 3.4	Database	2017
Textile - Polyester (PE)	ecoinvent 3.4	Database	2017



System boundary:

Life cycle stages included are described in figure and through the corresponding letter and number designations in the declaration.

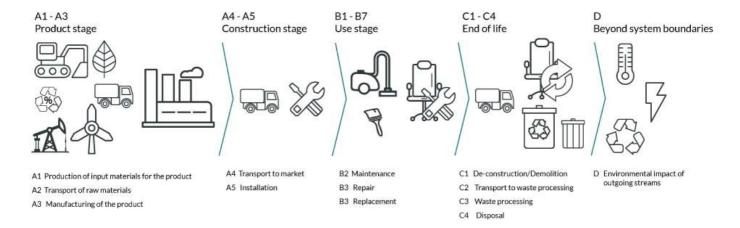

Additional technical information:

NEPD-2195-999-EN HÅG Creed 6004 4 / 8



The following information describe the scenarios in the different modules of the EPD.

The following information describe the scenarios in the different modules of the EPD.

Transportation to an average customer in Copenhagen is 1000 km (A4: average European lorry > 32 tonnes)

Transport from production place to user (A4)

Other Transportation

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck	55,0 %	Truck, over 32 tonnes, EURO 5	1000	0,022823	I/tkm	22,82
Railway					I/tkm	
Boat					I/tkm	
Other Transportation					I/tkm	

Assembly (A5)	53 - 10 - 10 - 10		Use (B	1)				
	Unit	Value					Unit	Value
Auxiliary	kg							
Water consumption	m ³							
Electricity consumption	kWh		1					
Other energy carriers	MJ		1					
Material loss	kg		1					
Output materials fr ste treatment	kg		1					
Dust in the air	kg		1					
VOC emissions	kg		1					
Maintenance (B2)/Repair (B3)			Replac	ement (B4)/Ref	urbishment (B5)			
	Unit	Value					Unit	Value
Maintenance cycle*	OCO.		Replac	cement cycle*				
Auxiliary	Char.		Electri	city consumptio	n		kWh	
Other resources			Replac	ement of worn	parts			
Water consumption	m ³	36	* Desc	ribed above if re	elevant			
Electricity consumption	kWh	.,(6	r .					
Other energy carriers	MJ		47					
Material loss	kg			'Aa				
VOC emissions	kg			" ara				
Operational energy (B6) and water consu	mption (B7)		End of	Life (C1.)	70.			
	MJ kg kg kg mption (B7) Unit m³ kWh MJ	Value		2.10 (0.1, 0	ot in-		Unit	Value
Water consumption	m ³		Hazard	dous waste dispo	sed 'C/		kg	
Electricity consumption	kWh		Collec	ted as mixed cor	nstruction w _b .	9~	kg	
Other energy carriers	MJ		Reuse			Ų	kg	
Power output of equipment	k/V		Recyc	ling				
			Energy	recovery				
			To lar	dfill			kg	
Transport to waste processing (C2)								
Transport to waste processing (C2)	Onno alt.							
Туре	Capacity utilisation (incl.	Type of v	rehicle	Distance km	Fuel/Energy consumption	Unit		Value (I/t)
	return) %							
Truck	return) %					I/tkm		
	return) %					l/tkm l/tkm		

NEPD-2195-999-EN HÅG Creed 6004 5 / 8

I/tkm



LCA: Results

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Constr instal sta	lation	User stage End of life stage				User stage				Beyond the system bondaries			
Raw materials	Transport	Manufacturing	Transport	Assembly	ηse	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	B6	B7	C1	C2	C3	C4	. D
Х	Х	Х	Х	MNR	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	. MND

Environmental impact

Parameter	Unit	A1	A2	А3	A4
GWP	kg CO ₂ -eq	5,96E+01	1,09E+00	1,61E-01	1,52E+00
ODP	kg CFC11 -eq	2,09E-06	0,00E+00	4,04E-09	2,96E-07
POCP	kg C ₂ H ₄ -eq	2,12E-02	1,72E-04	7,86E-05	2,46E-04
AP	kg SO ₂ -eq	2,63E-01	3,57E-03	1,73E-03	4,94E-03
EP	kg PO₄³eq	4,12E-02	6,00E-04	7,38E-04	8,29E-04
ADPM	kg Sb -eq	9,74E-04	0,00E+00	1,38E-05	3,43E-06
ADPE	MJ	6,39E+02	1,70E+01	1,04E+00	2,39E+01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

NEPD-2195-999-EN HÅG Creed 6004 6/8



Resource use

Parameter	Unit	A1	A2	А3	A4
RPEE	MJ	9,25E+01	3,08E-01	6,87E+01	4,31E-01
RPEM	MJ	1,92E+01	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	9,91E+01	3,08E-01	6,87E+01	4,31E-01
NRPE	MJ	7,54E+02	1,76E+01	1,24E+00	2,46E+01
NRPM	MJ	7,30E+01	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	8,27E+02	1,76E+01	1,24E+00	2,46E+01
SM	kg	8,27E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
W	m^3	5,28E-01	4,14E-03	1,01E-03	5,80E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPM Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	1,71E-02	6,00E-06	2,89E-05	1,31E-05
NHW	kg	3,72E+01	1,59E+00	2,56E-01	2,23E+00
RW	kg	INA*	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

End of life - Output flow

Parameter	Unit	A1	A2	А3	A4
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

NEPD-2195-999-EN HÅG Creed 6004 7 / 8

Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

Greenguard certified

Additional environmental information

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures. ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products. ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

and parga no	Program operator and publisher	Phone:	+47 97722020
epd-norge.no The Norwegian EPD Foundation	The Norwegian EPD Foundation		
The Norwegian EPD Foundation	Post Box 5250 Majorstuen, 0303 Oslo	e-mail:	post@epd-norge.no
	0303 Oslo Norway	web:	www.epd-norge.no
	Owner of the declaration	Phone:	0047 98 25 68 30
	Flokk AS	Fax:	
1,101:1:	Fridtjof Nansens vei 12,	e-mail:	atle.messel@flokk.com
	0369 Oslo	web:	https://www.flokk.com
	Author of the Life Cycle Assessment	Phone:	+47 916 50 916
$(1 \subset A)$	LCA.no AS	Fax:	
(LCA)	Dokka 1C	e-mail:	post@lca.no
.no	1671 Kråkerøy	web:	www.lca.no
	Developer of EPD generator	Phone:	+47 916 50 916
$(1 \subset A)$	LCA.no AS		
(LCA)	Dokka 1C	e-mail:	post@lca.no
.no	1671 Kråkerøy	web:	www.lca.no

NEPD-2195-999-EN HÅG Creed 6004